

# FCF<sup>®</sup> Series Air Conditioning


*The quietest and most versatile A/C system on the market.*

Each FCF<sup>®</sup> unit comes standard with a 4 or 5 inch ducting collar, high velocity 360 ° rotatable blower, remote mount electrical box, digital control with bezel, air filter, and reverse cycle heat.

**Shhhhhhhh**



Now with R410 greengas

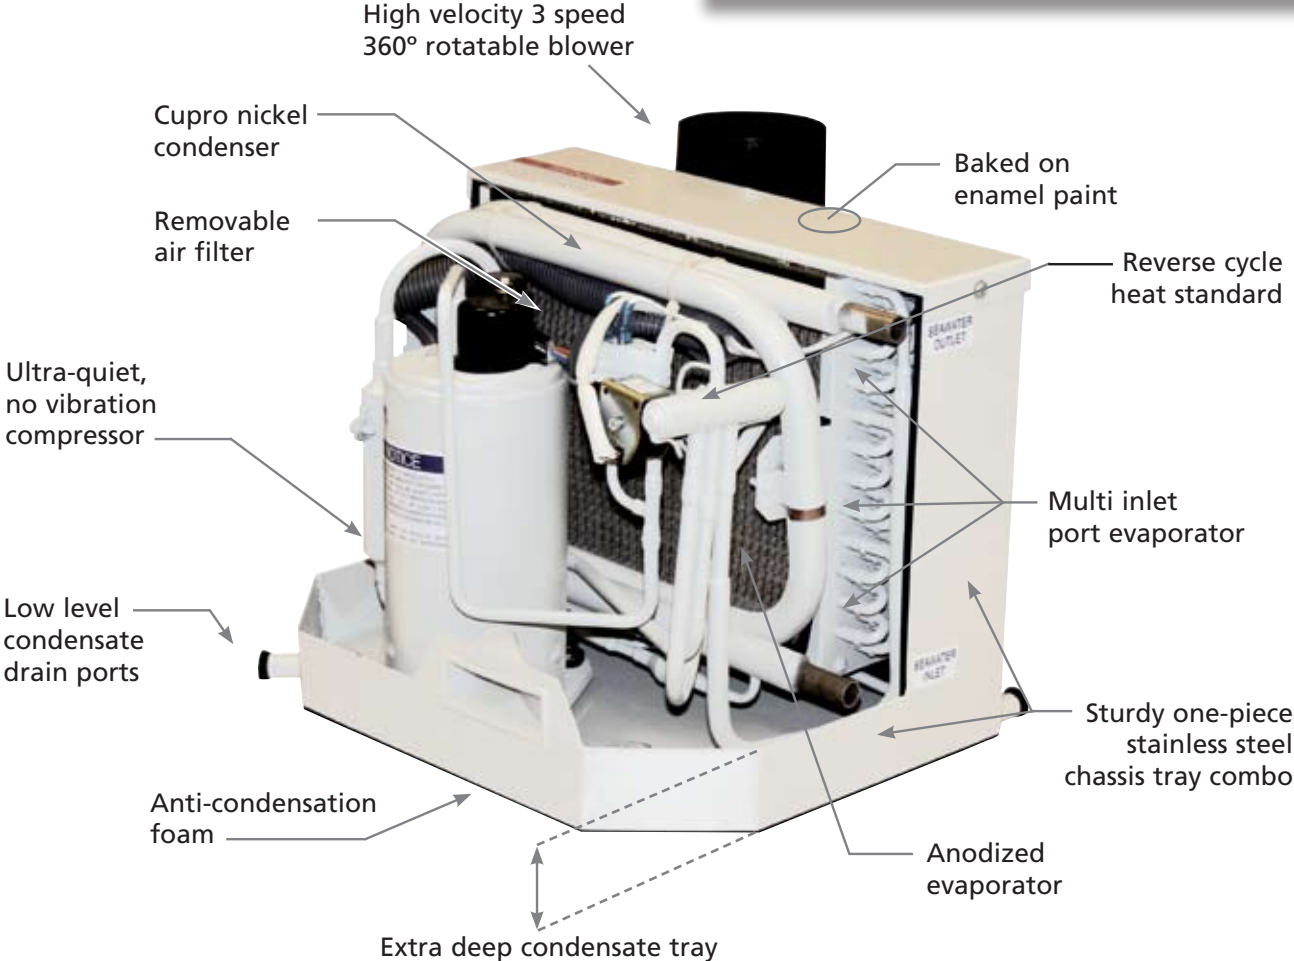



**FCF 5000**  
5000 Btu



**FCF 9000**  
9000 Btu

Freedom HF 1800



FCF-DV (Dual Voltage) models available.  
Includes either a 5,000 or 9,000 Btu unit  
with WB250 50/60Hz water pump and  
1000 or

Xantrex IP1012  
(Ignition Protected)



**FCF 12000**  
12000 Btu



**FCF 16000**  
16000 Btu

## A/C Specifications

	Part Number	Capacity	Suggested Supply Air	Suggested Return Air	Voltage	Frequency	Avg. Load	Net Weight	Blower Output	Ducting Collar Diam.	Condenser Conn. Diam.	Dimensions: L x W x H
FCF 5,000	FCF0005000GS FCF0005023GS	5,000 Btu (1.5 kW)	16 in <sup>2</sup> (103.2 cm <sup>2</sup> )	49 in <sup>2</sup> (316 cm <sup>2</sup> )	115 V 230 V	50/60 Hz	4.4 A / 2.2 A	50 lbs (23 kg)	282 cfm (479 m <sup>3</sup> /h)	4 in (102 mm)	5/8 in (15 mm)	11 13/32 x 14 7/8 x 11 19/32 in (290 x 378 x 295 mm)
FCF 9,000	FCF0009000GS FCF0009023GS	9,000 Btu (2.6 kW)	16 in <sup>2</sup> (103.2 cm <sup>2</sup> )	64 in <sup>2</sup> (413 cm <sup>2</sup> )	115 V 230 V	50/60 Hz	6.4 A / 3.2 A	57 lbs (26 kg)	344 cfm (584 m <sup>3</sup> /h)	4 in (102 mm)	5/8 in (15 mm)	14 7/8 x 15 1/2 x 11 19/32 in (378 x 394 x 295 mm)
FCF 12,000	FCF0012000GS FCF0012023GS	12,000 Btu (3.5 kW)	20 in <sup>2</sup> (129 cm <sup>2</sup> )	100 in <sup>2</sup> (645 cm <sup>2</sup> )	115 V 230 V	50/60 Hz	8.5 A / 4.5 A	68 lbs (31 kg)	410 cfm (696 m <sup>3</sup> /h)	5 in (127 mm)	5/8 in (15 mm)	14 7/8 x 16 7/64 x 12 7/8 in (378 x 409 x 327 mm)
FCF 16,000	FCF0016000GS FCF0016023GS	16,000 Btu (4.7 kW)	24 in <sup>2</sup> (154.8 cm <sup>2</sup> )	121 in <sup>2</sup> (780.6 cm <sup>2</sup> )	115 V 230 V	50/60 Hz	11 A / 5.5 A	76 lbs (33 kg)	505 cfm (858 m <sup>3</sup> /h)	5 in (127 mm)	5/8 in (15 mm)	17 11/16 x 17 5/16 x 12 11/16 in (450 x 439 x 322 mm)

## FCF-DV Specifications

	Part Number	Description
FCF-DV 5,000	5001541A	FCF 5,000 Btu A/C, 115 V, 1000 watt 50-amp IP inverter/charger, WB250 60 Hz water pump
FCF-DV 5,000	5001537A	FCF 5,000 Btu A/C, 115 V, 1800 watt 40-amp inverter/charger, WB250 60 Hz water pump
FCF-DV 9,000	5001538A	FCF 9,000 Btu A/C, 115 V, 1800 watt 40-amp inverter/charger, WB250 60 Hz water pump

### Kit Includes:


- Remote control unit
- Electronic controller with black bezel
- Full electrical panel assembly



Electronic Controller



Remote Control Unit

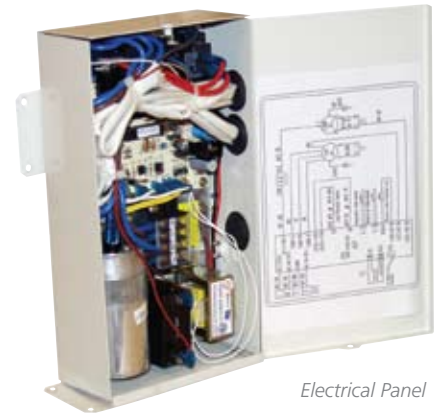

Electrical Panel

Advice · Installation · Service

Webasto Product  
North America, Inc.  
15083 North Road  
Fenton, MI 48430  
USA

Phone 800-860-7866  
Fax 810-593-6001

www.webasto-marine.com  
www.webasto.us